


PRAKTIC PIPE CLAMPS (With Nuts & Rubber Profile)

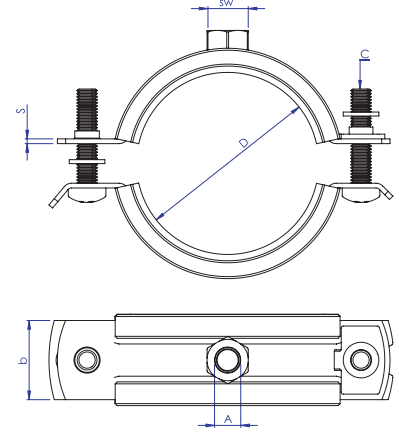

Technical Specifications

Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Rubber	Breaking Load (kN)	Recommended Load (kN)	Connection Screw (C)
PPCN - 01	1/4"	12-16	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 02	3/8"	15-19	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 03	1/2"	20-24	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 04	3/4"	26-30	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 05	1"	31-36	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 06	1 1/4"	40-46	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 07	1 1/2"	48-53	DIN EN 10130	1,20x20	M8	13	EPDM	1,5	1	M5X25
PPCN - 08	-	54-59	DIN EN 10130	1,50x20	M8	13	EPDM	1,5	1	M6X25
PPCN - 09	2"	60-64	DIN EN 10130	1,50x20	M8	13	EPDM	1,5	1	M6X25
PPCN - 10	-	70-73	DIN EN 10130	1,50x25	M8	13	EPDM	2	1,5	M6X30
PPCN - 11	2 1/2"	72-83	DIN EN 10130	2x25	M10	17	EPDM	2	1,5	M6X30
PPCN - 12	3"	87-92	DIN EN 10130	2x25	M10	17	EPDM	2	1,5	M6X30
PPCN - 13	-	95-103	DIN EN 10130	2x25	M10	17	EPDM	2	1,5	M6X30
PPCN - 14	4"	102-116	DIN EN 10130	2x25	M10	17	EPDM	2	1,5	M6X30
PPCN - 15	-	124-130	DIN EN 10130	2,5x25	M10	17	EPDM	2,5	2	M6X30
PPCN - 16	5"	132-141	DIN EN 10130	2,5x25	M10	17	EPDM	2,5	2	M6X30
PPCN - 17	6"	159-168	DIN EN 10130	2,5x25	M10	17	EPDM	2,5	2	M6X30

Features and Benefits


- Easy installation for practitioners.
- Two-piece pipe clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plate (5-10 µm).
- Noise insulating lining EPDM rubber.
- Noise insulation according to DIN 4109.
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.

Rubber Profiles

- Extruded profile.
- Chlorine-free
- Resistant to ozone, UV, weather and sea water
- Temperature resistance from - 50C to 110C
- Shore A hardness 50±5

PRAKTIC PIPE CLAMPS

(With Combi Nuts & Rubber Profile)

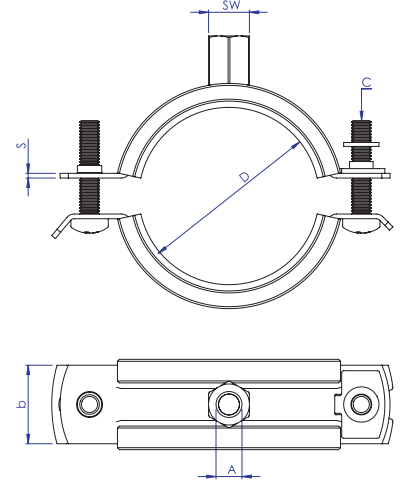

Technical Specifications

Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Rubber	Breaking Load (kN)	Recommended Load (kN)	Connection Screw (C)
PPCCN - 01	1/4"	12-16	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 02	3/8"	15-19	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 03	1/2"	20-24	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 04	3/4"	26-30	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 05	1"	31-36	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 06	1 1/4"	40-46	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 07	1 1/2"	48-53	DIN EN 10130	1,20x20	M8/M10	13	EPDM	1,5	1	M5X25
PPCCN - 08	-	54-59	DIN EN 10130	1,50x20	M8/M10	13	EPDM	1,5	1	M6X25
PPCCN - 09	2"	60-64	DIN EN 10130	1,50x20	M8/M10	13	EPDM	1,5	1	M6X25
PPCCN - 10	-	70-73	DIN EN 10130	1,50x25	M8/M10	13	EPDM	2	1,5	M6X25
PPCCN - 11	2 1/2"	72-83	DIN EN 10130	2x25	M8/M10	13	EPDM	2	1,5	M6X30
PPCCN - 12	3"	87-92	DIN EN 10130	2x25	M8/M10	13	EPDM	2	1,5	M6X30
PPCCN - 13	-	95-103	DIN EN 10130	2x25	M8/M10	13	EPDM	2	1,5	M6X30
PPCCN - 14	4"	102-116	DIN EN 10130	2x25	M8/M10	13	EPDM	2	1,5	M6X30
PPCCN - 15	-	124-130	DIN EN 10130	2,5x25	M8/M10	13	EPDM	2,5	2	M6X30
PPCCN - 16	5"	132-141	DIN EN 10130	2,5x25	M8/M10	13	EPDM	2,5	2	M6X30
PPCCN - 17	6"	159-168	DIN EN 10130	2,5x25	M8/M10	13	EPDM	2,5	2	M6X30

Features and Benefits

- Easy installation for practitioners.
- Two-piece pipe clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plate (5-10 µm).
- Noise insulating lining EPDM rubber.
- Noise insulation according to DIN 4109.
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.
- Connecting nut with combination thread M8/M10

Rubber Profiles

- Extruded profile.
- Chlorine-free
- Resistant to ozone, UV, weather and sea water
- Temperature resistance from - 50C to 110C
- Shore A hardness 50±5