


2S PIPE CLAMPS (With Nuts & Rubber Profile)

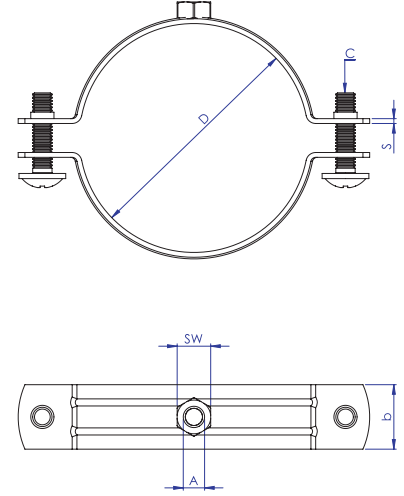

Technical Specifications

Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Recommended Load (kN)	Connection Screw (C)
2S N - 01	1/4"	12-15	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 02	3/8"	15-19	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 03	1/2"	20-24	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 04	3/4"	23-28	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 05	1"	31-36	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 06	1 1/4"	38-44	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 07	1 1/2"	44-50	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 08	-	54-58	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 09	2"	59-65	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S N - 10	-	62-67	DIN EN 10130	1,5X20	M8	13	2	M6X18
2S N - 11	2 1/2"	74-80	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 12	3"	83-93	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 13	-	95-103	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 14	4"	108-118	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 15	-	121-127	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 16	5"	132-143	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 17	6"	159-169	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 18	-	198-202	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 19	-	210-215	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 20	8"	216-225	DIN EN 10130	2X25	M10	17	2	M6X25
2S N - 21	-	249-254	DIN EN 10130	2X25	M10	17	2	M6X25

Features and Benefits


- Two-piece pipe clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plated (5-10 µm).
- Noise insulating lining EPDM rubber.
- Noise insulation according to DIN 4109.
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.

Rubber Profiles

- Extruded profile.
- Chlore - free
- Resistant to ozon UV, weather and sea water
- Temperature resistance from - 50C to 110C
- Shore A hardness 50±5

2S PIPE CLAMPS

(With Combi Nuts & Rubber Profile)

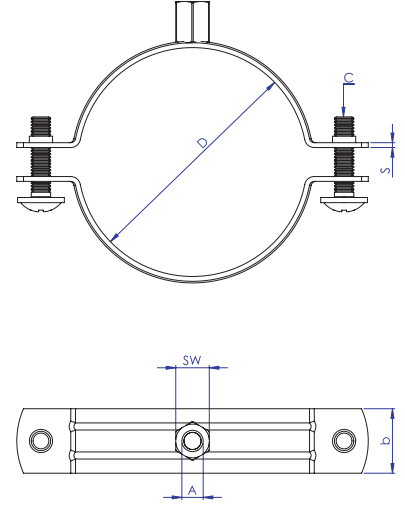

Technical Specifications

Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Recommended Load (kN)	Connection Screw (C)
2S CN - 01	1/4"	12-15	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 02	3/8"	15-19	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 03	1/2"	20-24	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 04	3/4"	23-28	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 05	1"	31-36	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 06	1 1/4"	38-44	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 07	1 1/2"	44-50	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 08	-	54-58	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 09	2"	59-65	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 10	-	62-67	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S CN - 11	2 1/2"	74-80	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 12	3"	83-93	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 13	-	95-103	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 14	4"	108-118	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 15	-	121-127	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 16	5"	132-143	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 17	6"	159-169	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 18	-	198-202	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 19	-	210-215	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 20	8"	216-225	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25
2S CN - 21	-	249-254	DIN EN 10130	2X25	M8/M10	13	1,5	M6X25

Features and Benefits


- Two-piece pipe clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plated (5-10 µm).
- Noise insulating lining EPDM rubber.
- Noise insulation according to DIN 4109.
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.
- Connecting nut with combination thread M8/M10.

Rubber Profiles

- Extruded profile.
- Chlore - free
- Resistant to ozon UV, weather and sea water
- Temperature resistance from - 50C to 110C
- Shore A hardness 50±5

2S PIPE CLAMPS

(With Nuts & Without Rubber Profile)

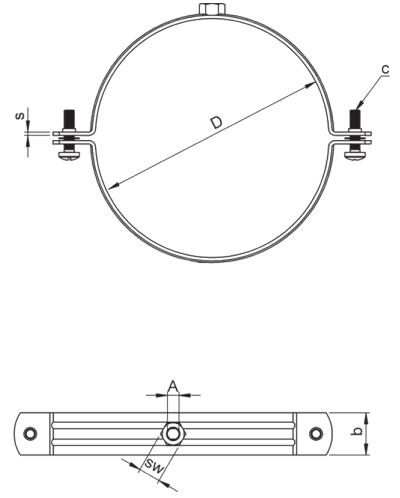

Technical Specifications


Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Recommended Load (kN)	Connection Screw (C)
2S WORN - 01	3/8"	14-18	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 02	1/2"	20-24	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 03	3/4"	23-28	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 04	1"	32-35	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 05	1 1/4"	39-44	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 06	1 1/2"	44-53	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 07	2"	56-65	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 08	-	62-69	DIN EN 10130	1,5X20	M8	13	1	M6X18
2S WORN - 09	2 1/2"	76-84	DIN EN 10130	1,5X20	M8	13	2	M6X18
2S WORN - 10	3"	82-92	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 11	-	95-103	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 12	4"	107-115	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 13	-	116-126	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 14	5"	133-140	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 15	6"	159-168	DIN EN 10130	2X25	M10	17	2	M6X25
2S WORN - 16	8"	207-215	DIN EN 10130	2X25	M10	17	2	M6X25

Features and Benefits

- Two-piece pie clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plated (5-10 µm).
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.

2S PIPE CLAMPS

(With Combi Nuts & Without Rubber Profile)

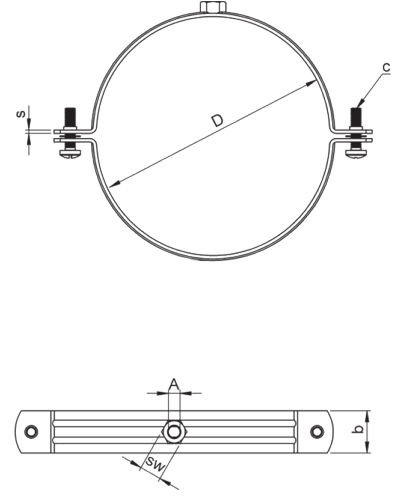

Technical Specifications

Product Code	Size (Inch)	Tighten Range D(mm)	Material	Material Dimension (bxs)	Hanging Nuts (A)	SW	Recommended Load (kN)	Connection Screw (C)
2S WORCN - 01	3/8"	14-18	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 02	1/2"	20-24	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 03	3/4"	23-28	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 04	1"	32-35	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 05	1 1/4"	39-44	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 06	1 1/2"	44-53	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 07	2"	56-65	DIN EN 10130	1,5X20	M8/M10	13	1	M6X18
2S WORCN - 08	-	62-69	DIN EN 10130	1,5X20	M8/M10	13	2	M6X18
2S WORCN - 09	2 1/2"	76-84	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 10	3"	82-92	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 11	-	95-103	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 12	4"	107-115	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 13	-	116-126	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 14	5"	133-140	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 15	6"	159-168	DIN EN 10130	2X25	M8/M10	13	2	M6X25
2S WORCN - 16	8"	207-215	DIN EN 10130	2X25	M8/M10	13	2	M6X25

Features and Benefits

- Two-piece pie clamp with lining.
- Locking screw secured against loss.
- Better adaptation to different pipe cross sections due to two locking screws.
- Electro zinc plated (5-10 µm).
- Locking screw: Flat head screw with combination recessed head.
- Fire behavior DIN 4102 class B2.
- Connecting nut with combination thread M8/M10.