


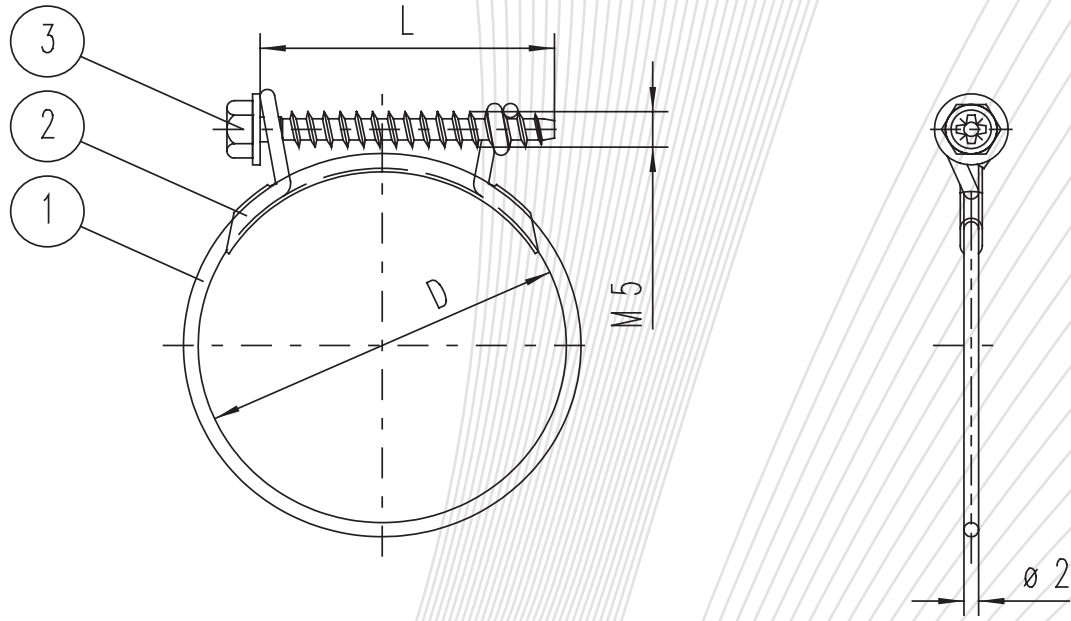

TECHNICAL DATA

1. CLAMP
2. GUIDE
3. SCREW
4. SALT SPRAY TEST :
5. TIGHTENING TORQUE :

Material :
Material :
Material :

Steel EN 10270-1-SM-2.00 mm (C72) Galvanized
Aluzink B 500 A
Steel C21 B KB UNI 7356
48 h -Uni Iso 9227
Max 2 N/mm

CODE NO	DIAMETER		SCREW LENGTH (mm)
	D Max.(mm)	D Min.(mm)	
5350470	47	43	L=40
5350490	49	42	L=40
5350540	54	49	L=40
5350565	56,5	52	L=40
5350590	59	50	L=40
5350650	65	58	L=40
5350690	69	61	L=40
5350750	75	68	L=45
5350795	79,5	72	L=45
5350830	83	76	L=45
5350851	85	78	L=45
5350900	90	82	L=45
5350950	95	85	L=45
5350985	98,5	91	L=45
5351000	100	95	L=45
5351050	105	98	L=45
5351100	110	100	L=45
5351150	115	105	L=45
5351200	120	113	L=45